


SUN BAR Monoarc adjustable attacks on bimini

Customization Order form

STANDARD FEATURES and REQUESTED MEASURES FOR CUSTOMIZATION

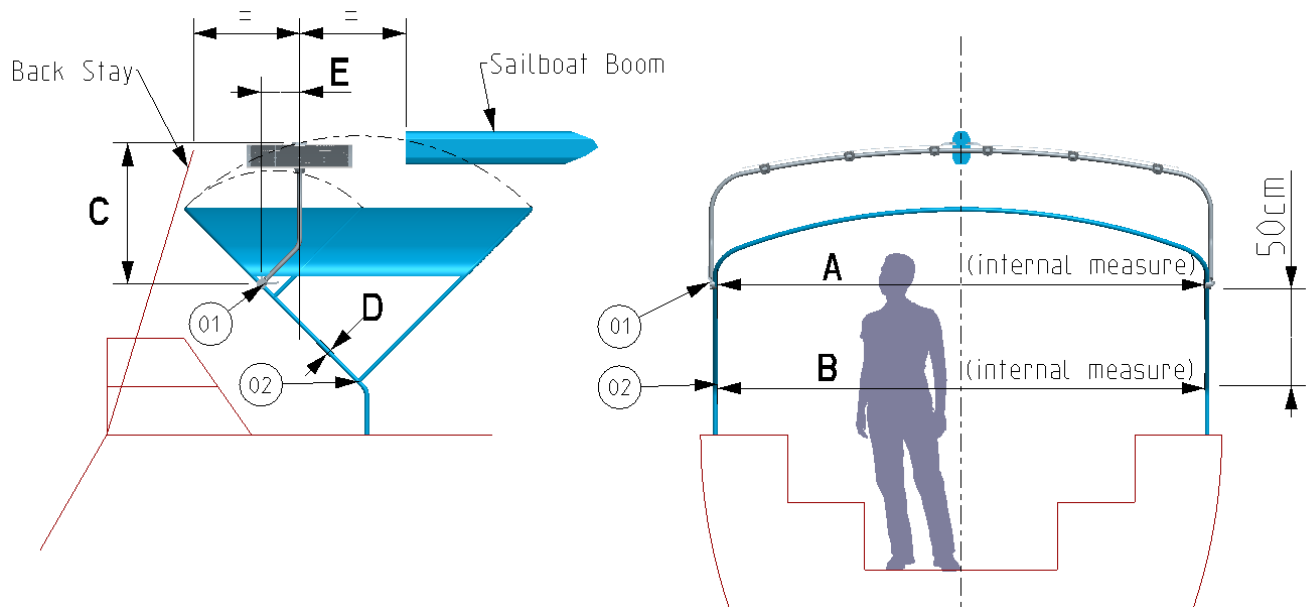

STANDARD FEATURES

DETAILS

Define the longitudinal position of the **Monoarc** about halfway between the end of the boom and the backstay. Mark the fixation point some centimeters below the textile on the fixed tubular of the bimini structure (point 01). At these points the **Monoarc** will be fixed with the 2 adjusting attachments. Measure dimension "A" (internal surface).

Measurement "B" (point 02 internal surface) is needed to determine the vertical inclination of the bimini (max. 10° - 15°). Define the measure "C" according to the maximum height reached by the mobile part of the bimini during the rotation for closing.

"E" defines the position of the arc with respect to the fixing point.

A stable bimini is required for the correct stability of the structure

NOTE: any feasible changes on standard features will be quoted in addition to standard solution

REQUESTED MEASURES FOR CUSTOMIZATION

A = _____ cm
B = _____ cm
C = _____ cm
D = _____ cm
E = _____ cm

NOTE: please attach some pictures of the boat

SPECIFIC REQUESTS
