


SUN BAR Monoarc NOA attacks on bimini

Customization Order form

STANDARD FEATURES and REQUESTED MEASURES FOR CUSTOMIZATION

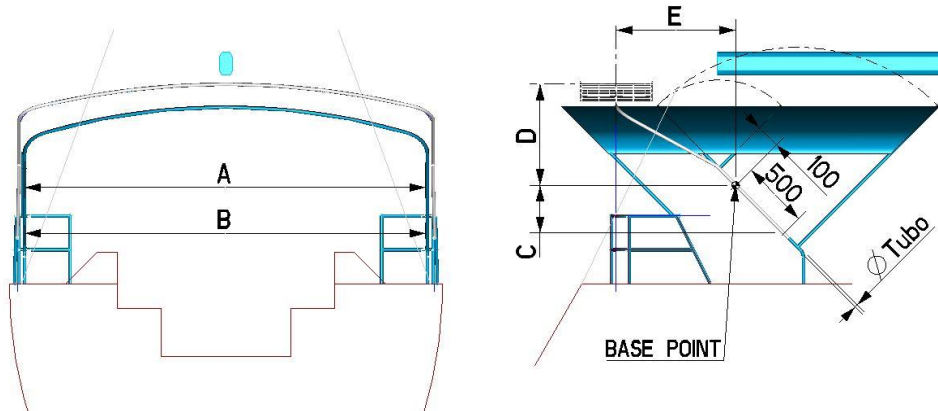

STANDARD FEATURES

DETAILS

Define the position of the BASE POINT on the fixed arch of the bimini, about 100 mm below the intermediate arch attachment. Record measurement C necessary to define fixed arch angle. Measure the distances A and B inside the bimini posts and record the tube diameter. Tension a thin rope between the BASE POINTS of the fixed arch and define the measures D and E such that the center of the solar arc will be at the desired position above the bimini canvas.

NOTE: any feasible changes on standard features will be quoted in addition to standard solution

REQUESTED MEASURES FOR CUSTOMIZATION

A = _____ cm
B = _____ cm
C = _____ cm
D = _____ cm
E = _____ cm
ΦTubo = _____ cm

NOTE: please attach some pictures of the boat

SPECIFIC REQUESTS
